


			(Iten	n:V36DR-2)					
	1 44PCS Φ3.5*12mm	2 8PCS Φ4*16mm	3 4PCS Ф4*20mm	4 4PCS Φ4*25mm		16PCS Ф3.5*12mm	6 11PCS	7 12PCS Bumper	
Handriana	Round head screw	Flat head screw	Round head screw	Black flat head screw	R	ound head screw	L-shape bracket		
Hardware list	{ mmmmm>		{		{ mmmmm >		000		
Assembly tools				8 4PCS 1-1/4" Hinge	9	2PCS SS30-457 Drawer slide	10 4PCS Galvanized Bracket	11	
required	Screw driver	Rubber mallet	H Drawer front		•		0000		
Cabinet Part List	A Front frame		F	D Back panel	Е	l	F Adjustable shelf		
	(A) of cabinet lay down then put glue into groove.		Step 2 : Install side panel. Insert both side panel(B) into groove of front frame(A) until side panel(B) and front frame(A)even.			Step 3: Install bottom panel. Insert the bottom panel (C) into groove of side panel(B) until it into the groove of front frame(A).			
ton A. Instell healt general	A A A A A A A A A A A A A A A A A A A			Side panel Install 1-shape insert bracket Tirst before assomble to the front frame(A).		Step 6 : Install toe kick panel. Fit in the L-shape			
Step 4 : Install back panel. Insert back panel (D) into groove of left and right side panel(B).		Step 5: Install s	screw (4) Ø4x25mm	Back ponel (b)	i (Step 6 : Install toe kick panel. Fit in the L-shape insert bracket from toe kick panel (E) into side panel (B) bracket and screw the bracket with(1) $\Phi 3.5*12 mm$ screw.		Toe kick panel (E) Toe kick panel (E) Trist assemble side	




Vanity Sink Base Cabinet Assembly Instruction


(Item: V36DR-2)

Step 7 : Install back panel. Fit in the L-shape insert bracket from back panel (D) into side panel (B) bracket and assembly the bracket with (1) Φ 3.5*12mm screw.

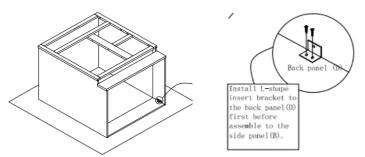



Step 8: Install corner block. Install rainbow bracket to the side panel (B), front frame (A) and back panel (D)with the (5)Ø4*16mm screw.







Step 9: Install the drawer slide rear bracket. Screw the rear slide bracket to the back panel (D)






Step 10: Insert drawer slide runner to the rear slide bracket and screw the drawer slide to the guide hole of front frame (A) and hole for drawer slide.






Step 11: Put the drawer box on the drawer slide and push the drawer box to make the end of runner is lock to the hole of the drawer back panel. Complete the installation of the drawer box when your hear sound click which mean the locking device is locked on the drawer slide.





Step 12: Install door panel (G). Screw the hinge to the front frame (A) and door (G).



Step 13: Finish installion of the cabinet

